
INTERIM DATA SHEET
(Subject to change without notice)
August 18, 1994

STR-M6529

Data Sheet
28102.1

OFF-LINE SWITCHING REGULATOR – WITH POWER MOSFET OUTPUT

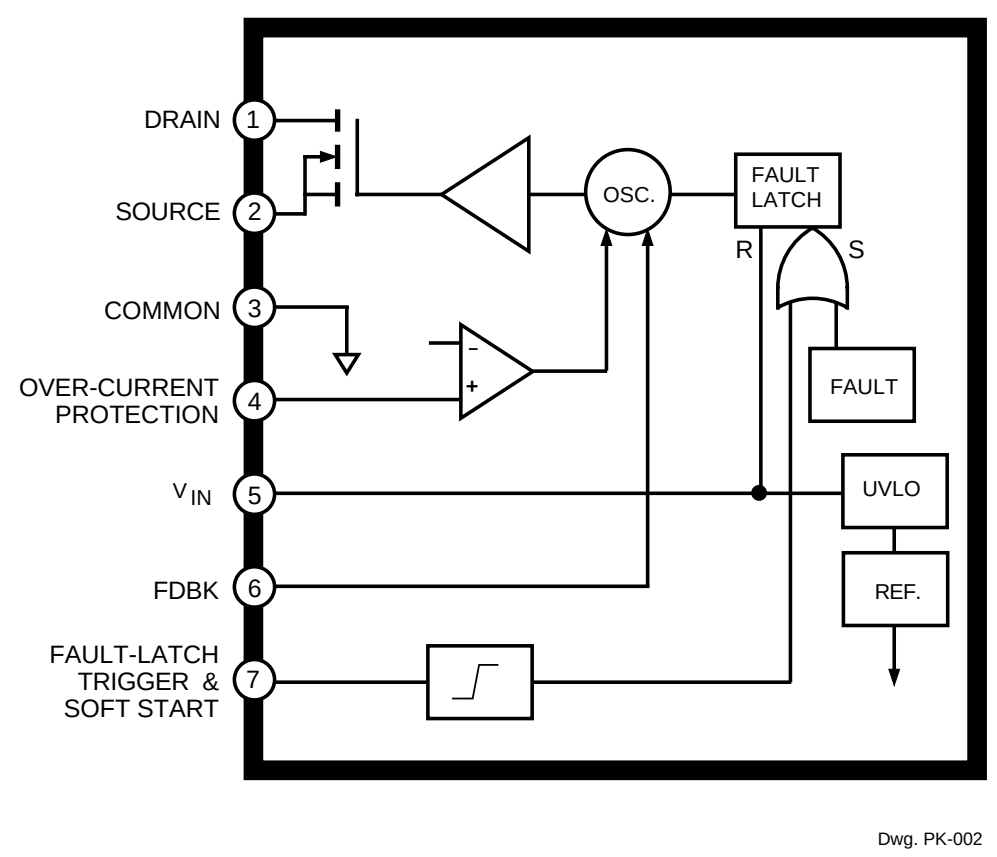

ABSOLUTE MAXIMUM RATINGS

Supply Voltage, V_{IN} .... **35 V**

Drain-Source Voltage, V_{DS} .... **800 V**

Continuous Drain Current, I_D .... **5.4 A**

1 ms Single-Pulse Drain Current, I_{DM} .... **20 A**

Single-Pulse Avalanche Energy, E_A .... **400 mJ**

Soft-Start/Fault-Latch Trig. Voltage, $V_{SS/FL}$ .... **12 V**

Feedback Input Current, I_{FDBK} .... **20 mA**

Over-Current Protection Voltage, V_{OCP} .... **3.5 V**

Insulation Voltage, $V_{WM(RMS)}$ .... **2000 V**

Package Power Diss., P_D .... **See Graph**

FET Junction Temperature, T_J ...... **+150°C**

Internal Frame Temperature, T_F ... **+125°C**

Operating Temperature Range, T_A .... **-20°C to +125°C**

Storage Temperature Range, T_{stg} .... **-40°C to +125°C**

The STR-M6529 is specifically designed to meet the requirement for increased integration and reliability in off-line flyback converters operating in the quasi-resonant ringing choke mode. The device incorporates the primary control and drive circuit with a discrete avalanche-rated high-voltage power MOSFET.

Crucial system parameters such as maximum ON time and OFF time are fixed during manufacture. Local control circuit decoupling and layout are optimized within the device.

Cycle-by-cycle current limiting, soft start, under-voltage lock-out with hysteresis, over-voltage protection, and thermal shutdown protect the devices during all normal and overload conditions. Over-voltage protection, thermal shutdown, or an external fault signal are latched. The dual requirements of dielectric isolation and low transient thermal impedance and steady-state thermal resistance are satisfied in an over-molded single-in-line power package.


Proven in substantial volumes, this device and its fixed-frequency counterparts represents a significant advance in off-line SMPS reliability growth and integration.

FEATURES

- Quasi-Resonant Ringing Choke Converter
- Avalanche-Rated Power MOSFET Switch
- Pulse-by-Pulse Current Limiting
- Latched Over-Voltage and Thermal Protection
- Maximum ON Time and OFF Time Set During Manufacture
- Internal Under-Voltage Lockout with Hysteresis
- Over-Molded SIP with Integral Isolated Heat Spreader


Always order by complete part number: **STR-M6529** .

FUNCTIONAL BLOCK DIAGRAM

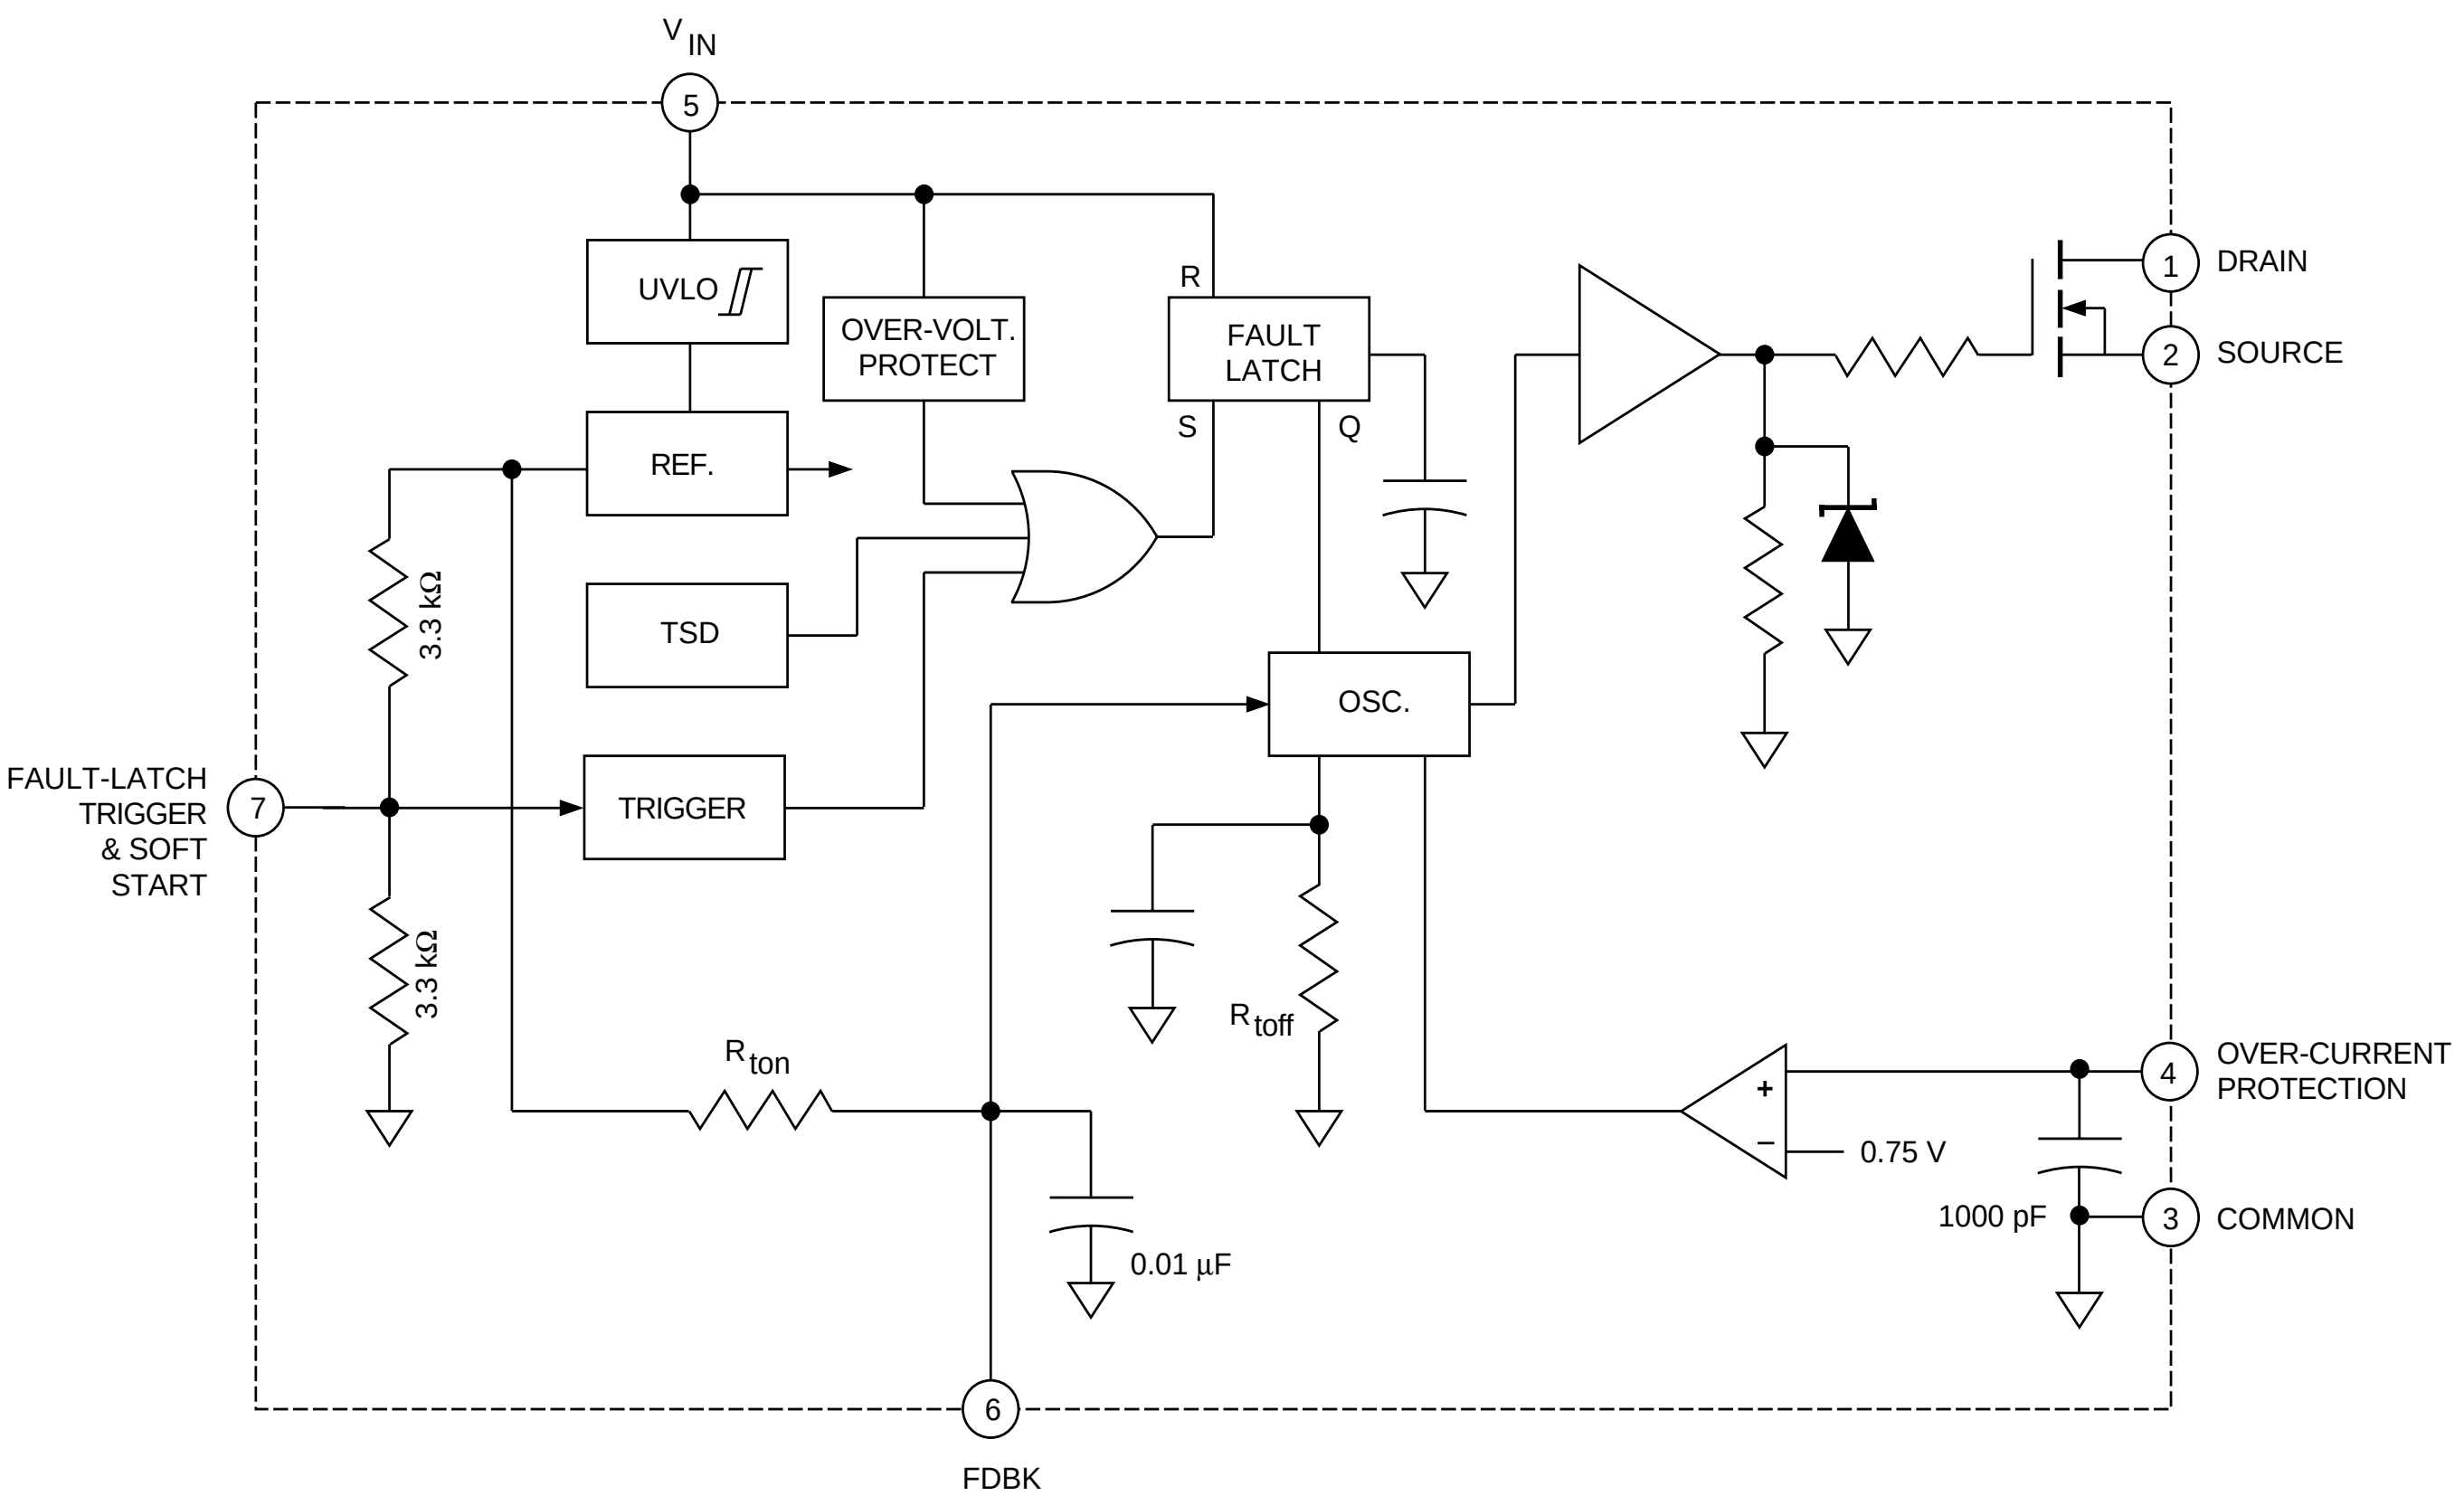


Dwg. FK-002-2

ALLOWABLE PACKAGE POWER DISSIPATION

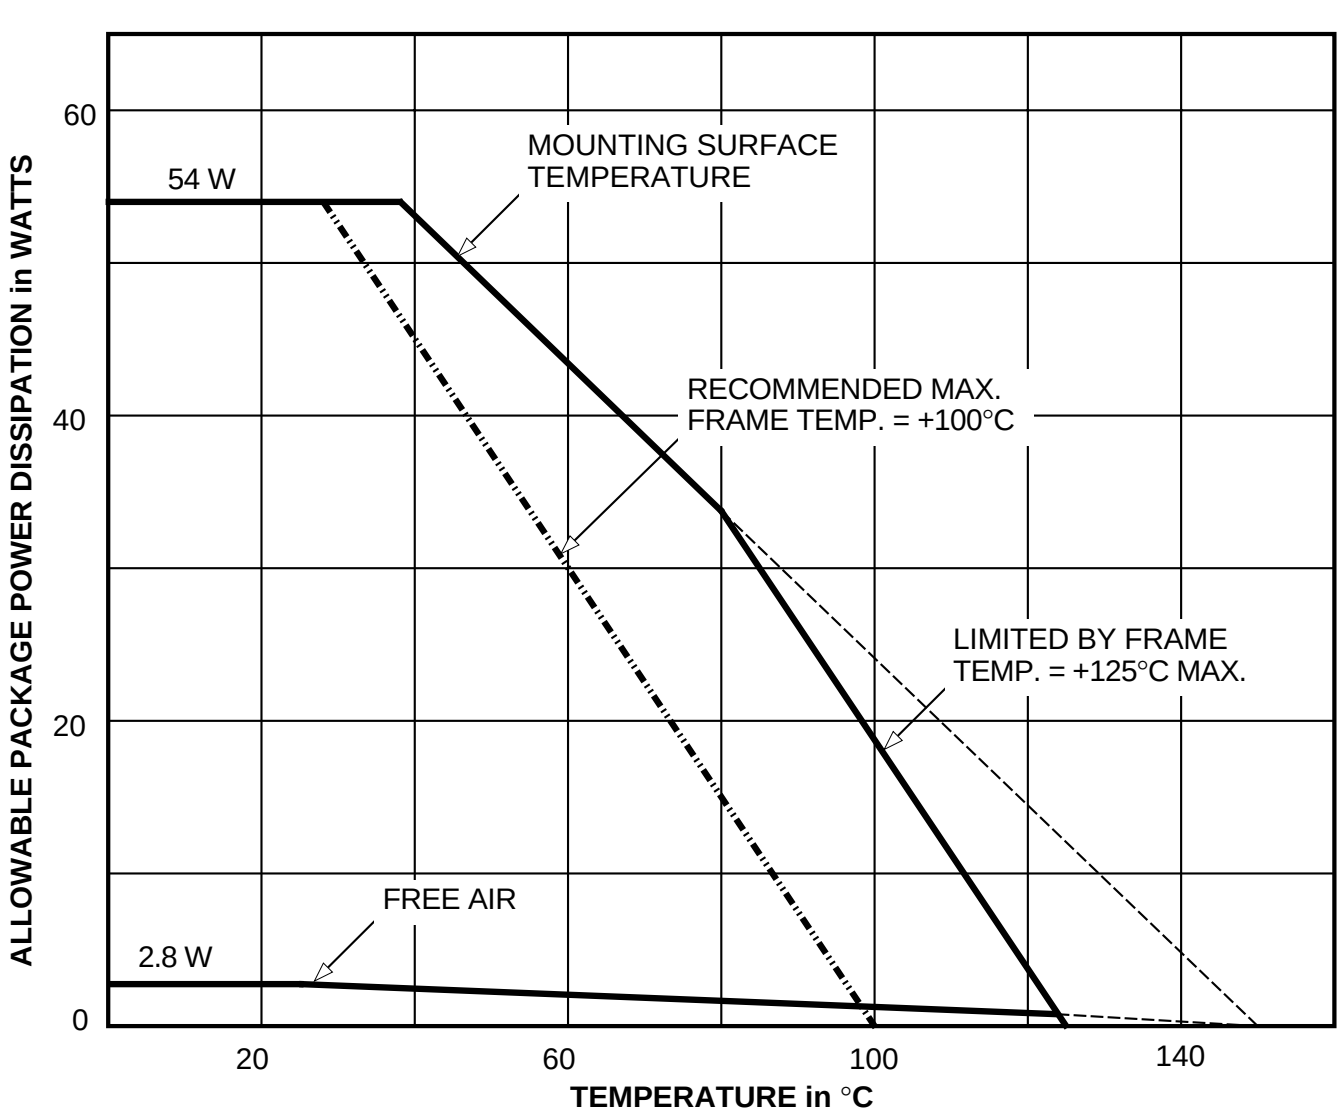

Dwg. GK-003-1


MAXIMUM SAFE OPERATING AREA

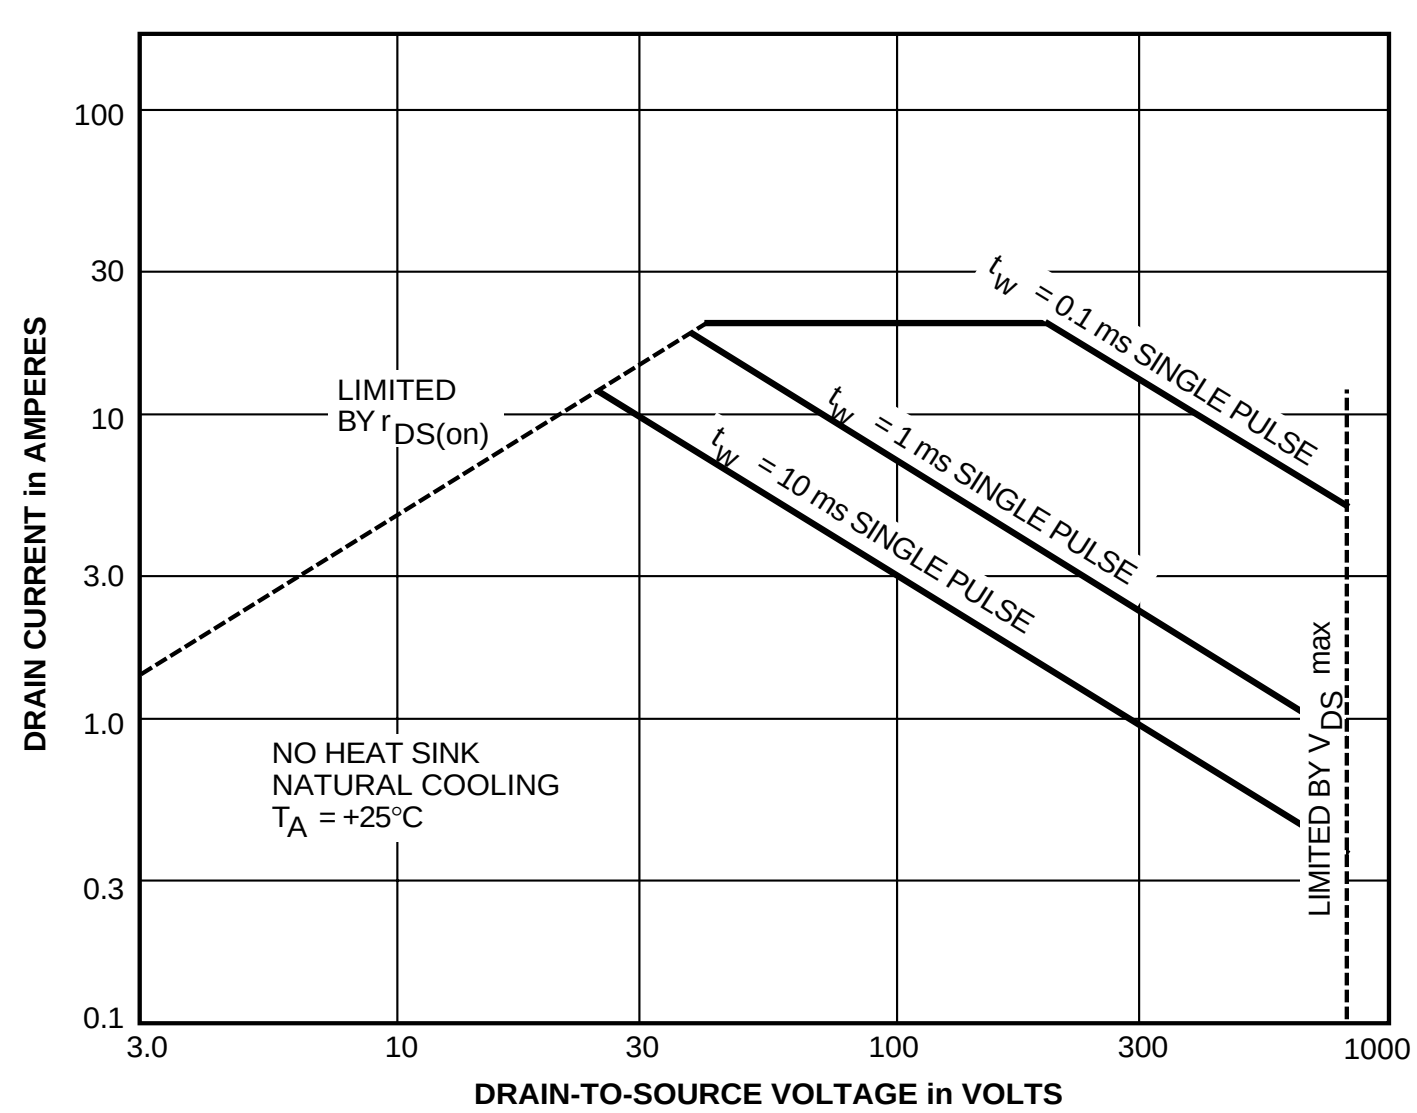

Dwg. GK-004-1

115 Northeast Cutoff, Box 15036
Worcester, Massachusetts 01615-0036 (508) 853-5000

ALLOWABLE AVALANCHE ENERGY

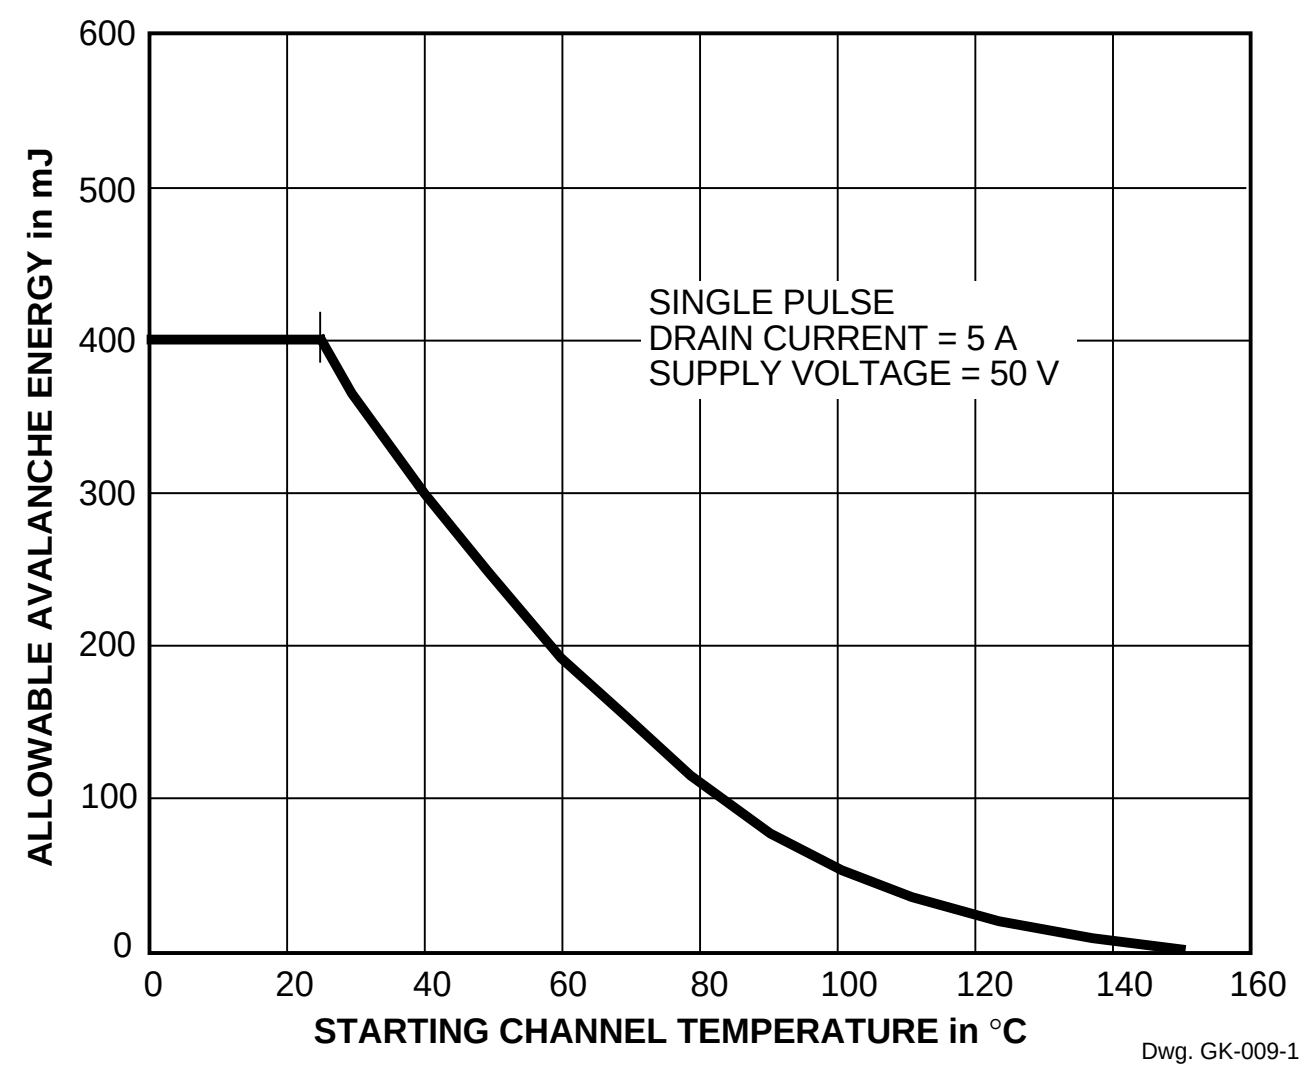

ELECTRICAL CHARACTERISTICS at T_A = +25°C, V_{IN} = 18 V, voltage measurements are referenced to Common (pin 3) (unless otherwise noted).


Characteristic	Symbol	Test Conditions	Limits Min.	Typ.	Max.	Units
On-State Voltage	V_{INT}	Turn-on, increasing V_{IN}	14.4	–	17.6	V
Under-Voltage Lockout	V_{INQ}	Turn-off, decreasing V_{IN}	9.0	–	11	V
Over-Voltage Threshold	$V_{OVP(th)}$		26	–	31	V
FET Leakage Current	I_{DSS}	V_{DS} = 800 V	–	–	300	µA
FET ON Resistance	$r_{DS(on)}$	V_{GS} = 10 V, I_D = 2.5 A	–	1.8	2.2	Ω
Output Fall Time	t_f	V_{DD} = 250 V, I_D = 2.5 A, 10% to 90% V_{DS}	–	–	250	ns
Maximum ON Time	t_{on}		22.5	–	27.5	µs
Minimum OFF Time	t_{off}		2.0	–	4.0	µs
Over-Current Threshold	$V_{OCP(th)}$		700	–	800	mV
Feedback Threshold	$V_{FDBK(th)}$		–	750	–	mV
Soft-Start Current	I_{SS}	V_{SS} = 0 V	-2.2	–	-3.4	mA
Fault-Latch Threshold Volt.	$V_{FL(th)}$		8.0	–	9.2	V
Fault-Latch Holding Current	I_{INH}	V_{IN} reduced to 8.5 V	–	340	400	µA
Fault-Latch Reset Voltage	V_{INQ}	I_{IN} <20 µA, V_{IN} reduced from 31 V	6.5	–	8.5	V
Insulation RMS Voltage	$V_{WM(RMS)}$	All terminals simultaneous reference metal plate against backside	2000	–	–	V
Supply Current	$I_{IN(ON)}$	Operating	16	–	26	mA
	$I_{IN(OFF)}$	Start up, V_{IN} =14 V	–	–	100	µA
Thermal Shutdown	T_J		125	150	–	°C
Thermal Resistance	$R_{\theta JM}$	FET junction to mounting surface	–	2.0	–	°C/W

NOTES: Negative current is defined as coming out of (sourcing) the specified device terminal.
Typical Data is for design information only.

STR-M6529
OFF-LINE SWITCHING REGULATOR

TYPICAL APPLICATION

WARNING: lethal potentials are present. See text.

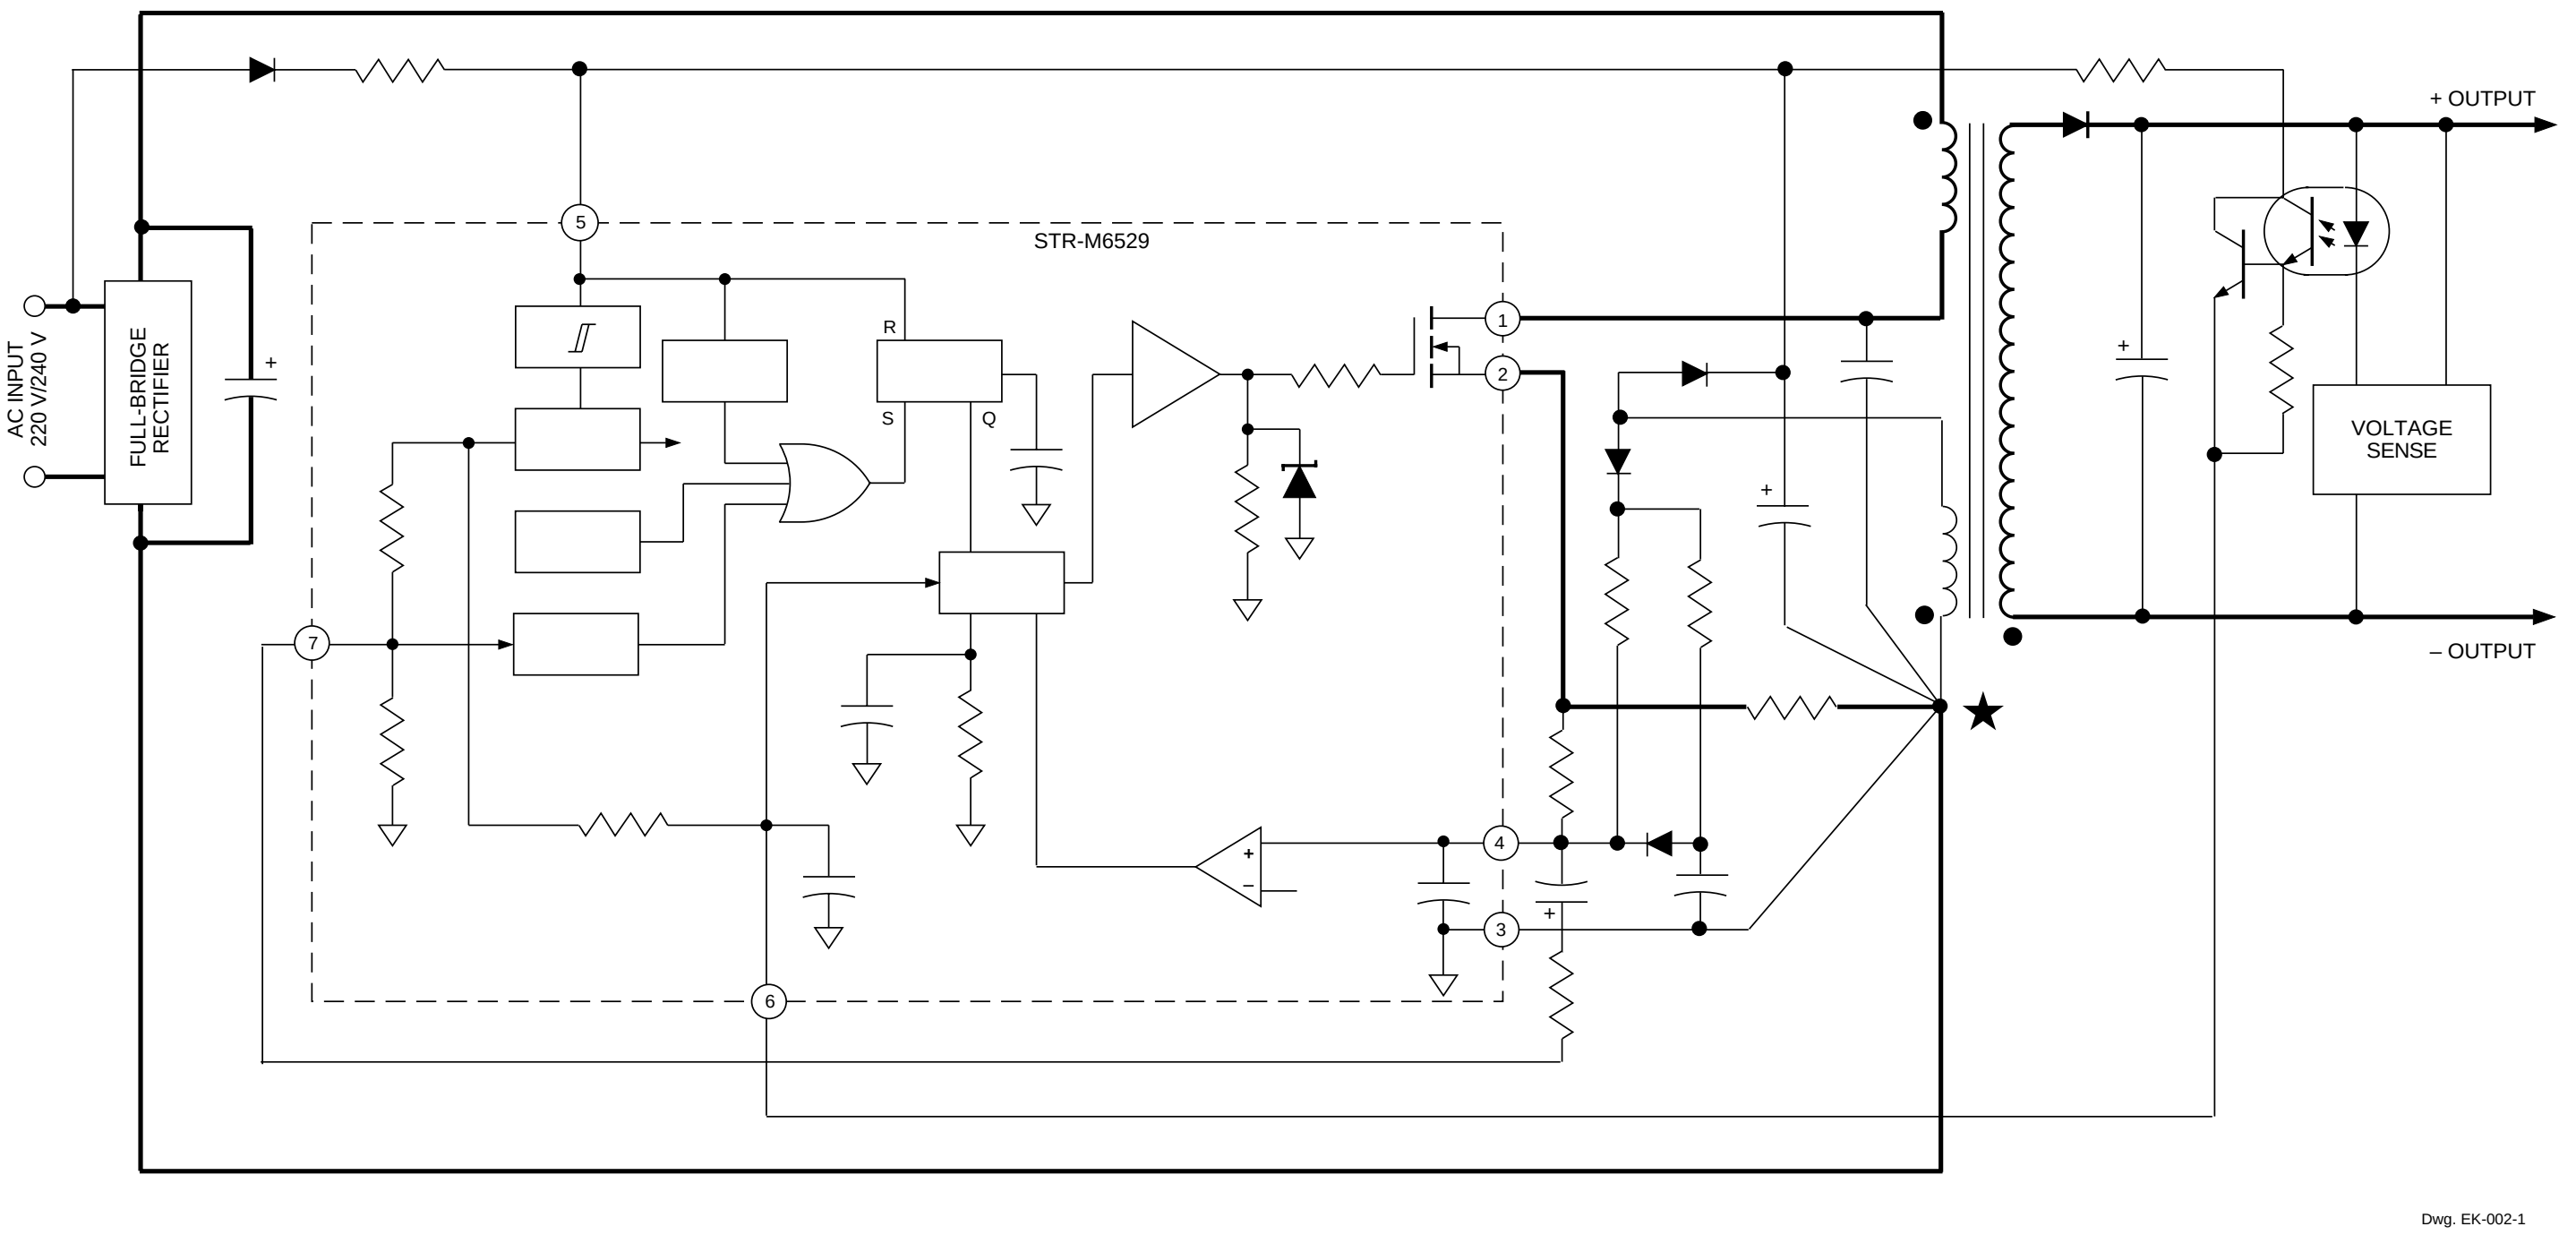

APPLICATIONS INFORMATION

WARNING — These devices are designed to be operated at lethal voltages and energy levels.
Circuit designs that embody these components must conform with applicable safety requirements.
Precautions must be taken to prevent accidental contact with power-line potentials.
Do not connect grounded test equipment.

The use of an isolation transformer is recommended during circuit development and breadboarding.

The power MOSFET outputs of these devices are similar to the International Rectifier type IRFPE40. These devices feature an excellent combination of fast switching, ruggedized device design, low on-resistance, and cost effectiveness.


Recommended mounting hardware torque:

4.34 – 5.79 lbf•ft (6 – 8 kg•cm or 0.588 – 0.784 Nm).

Recommended metal-oxide-filled, alkyl-degenerated oil base, silicone grease:


Dow Corning 340, or equivalent

Dimensions in Inches
(Based on 1 mm = 0.03937")

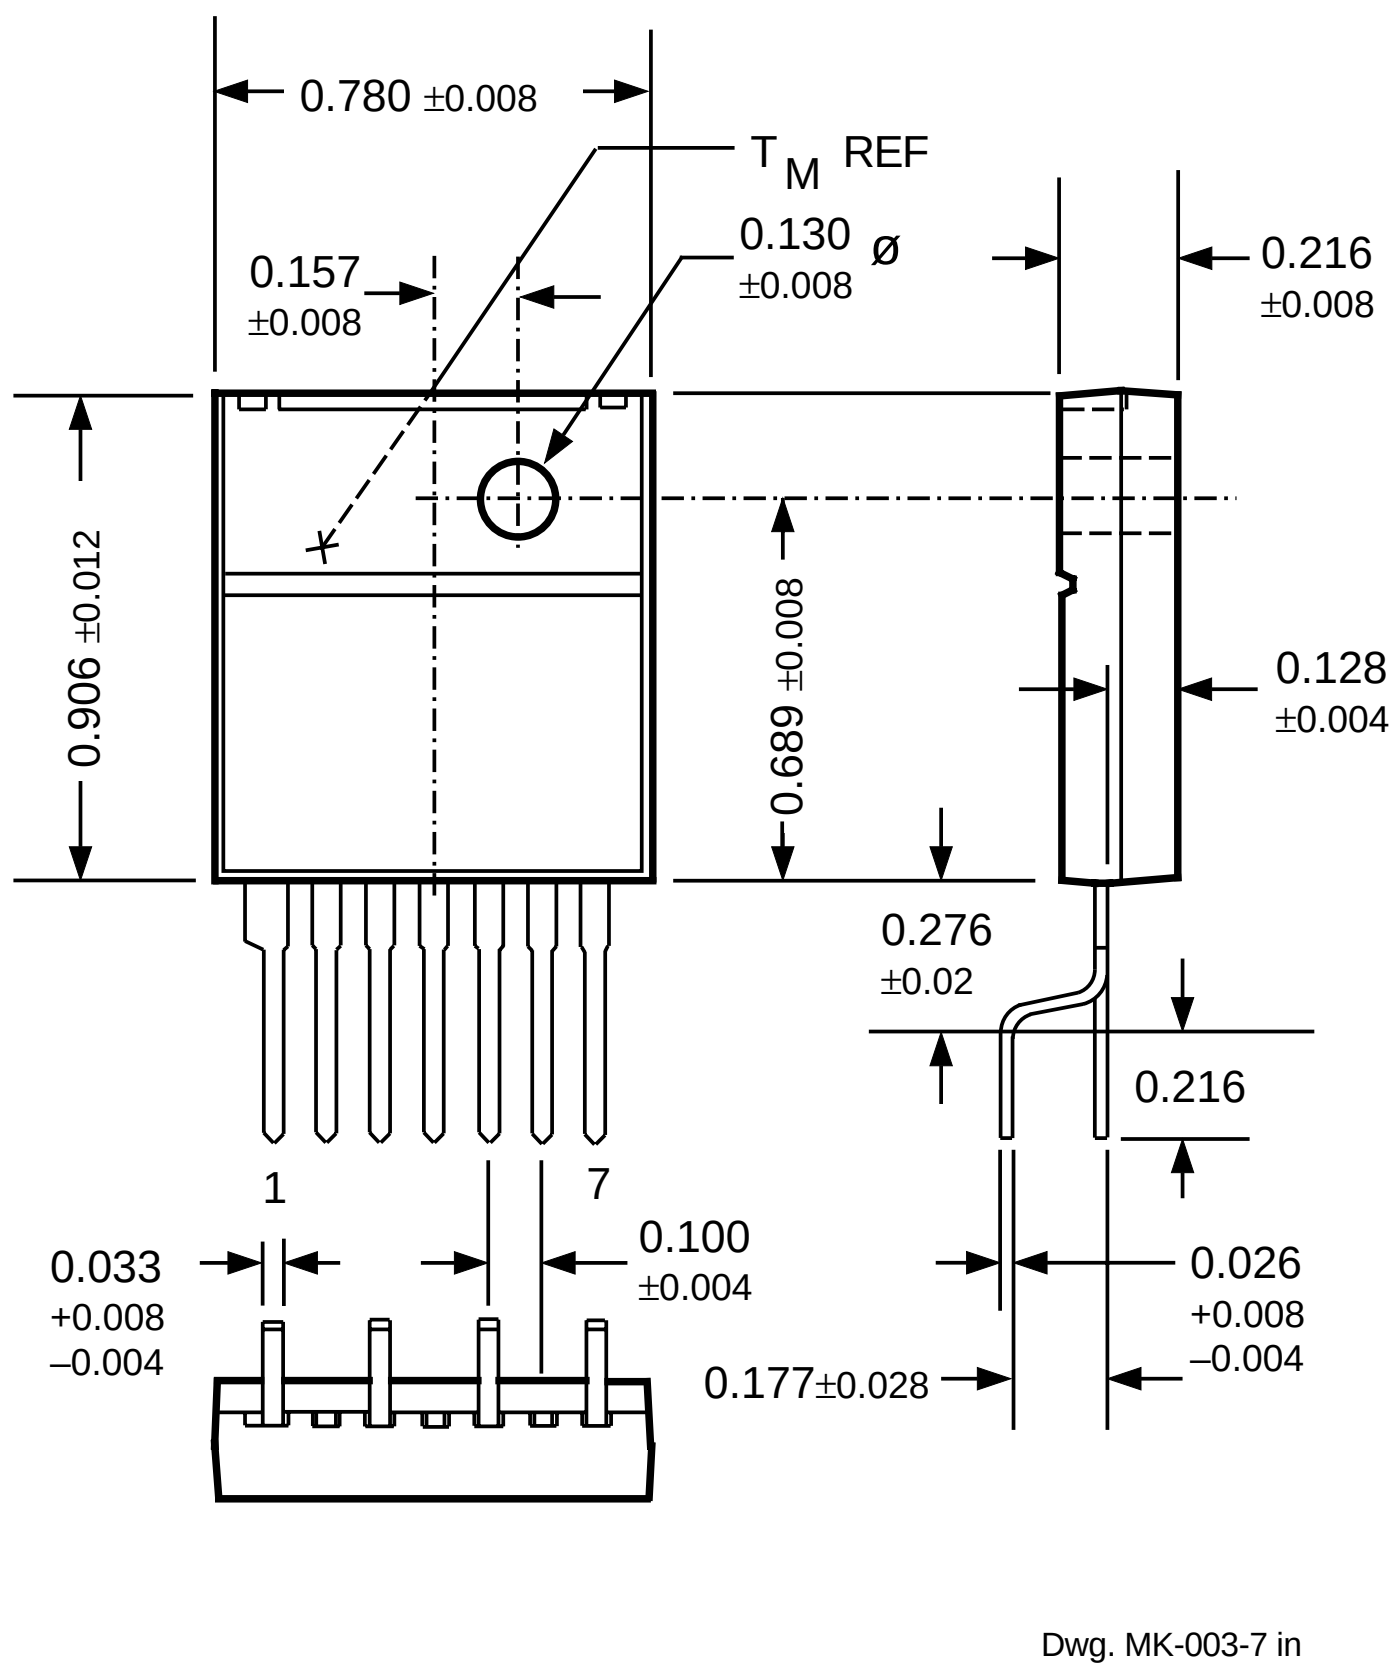

NOTE: Exact body and lead configuration at vendor’s option within limits shown.

Dimensions in Millimeters

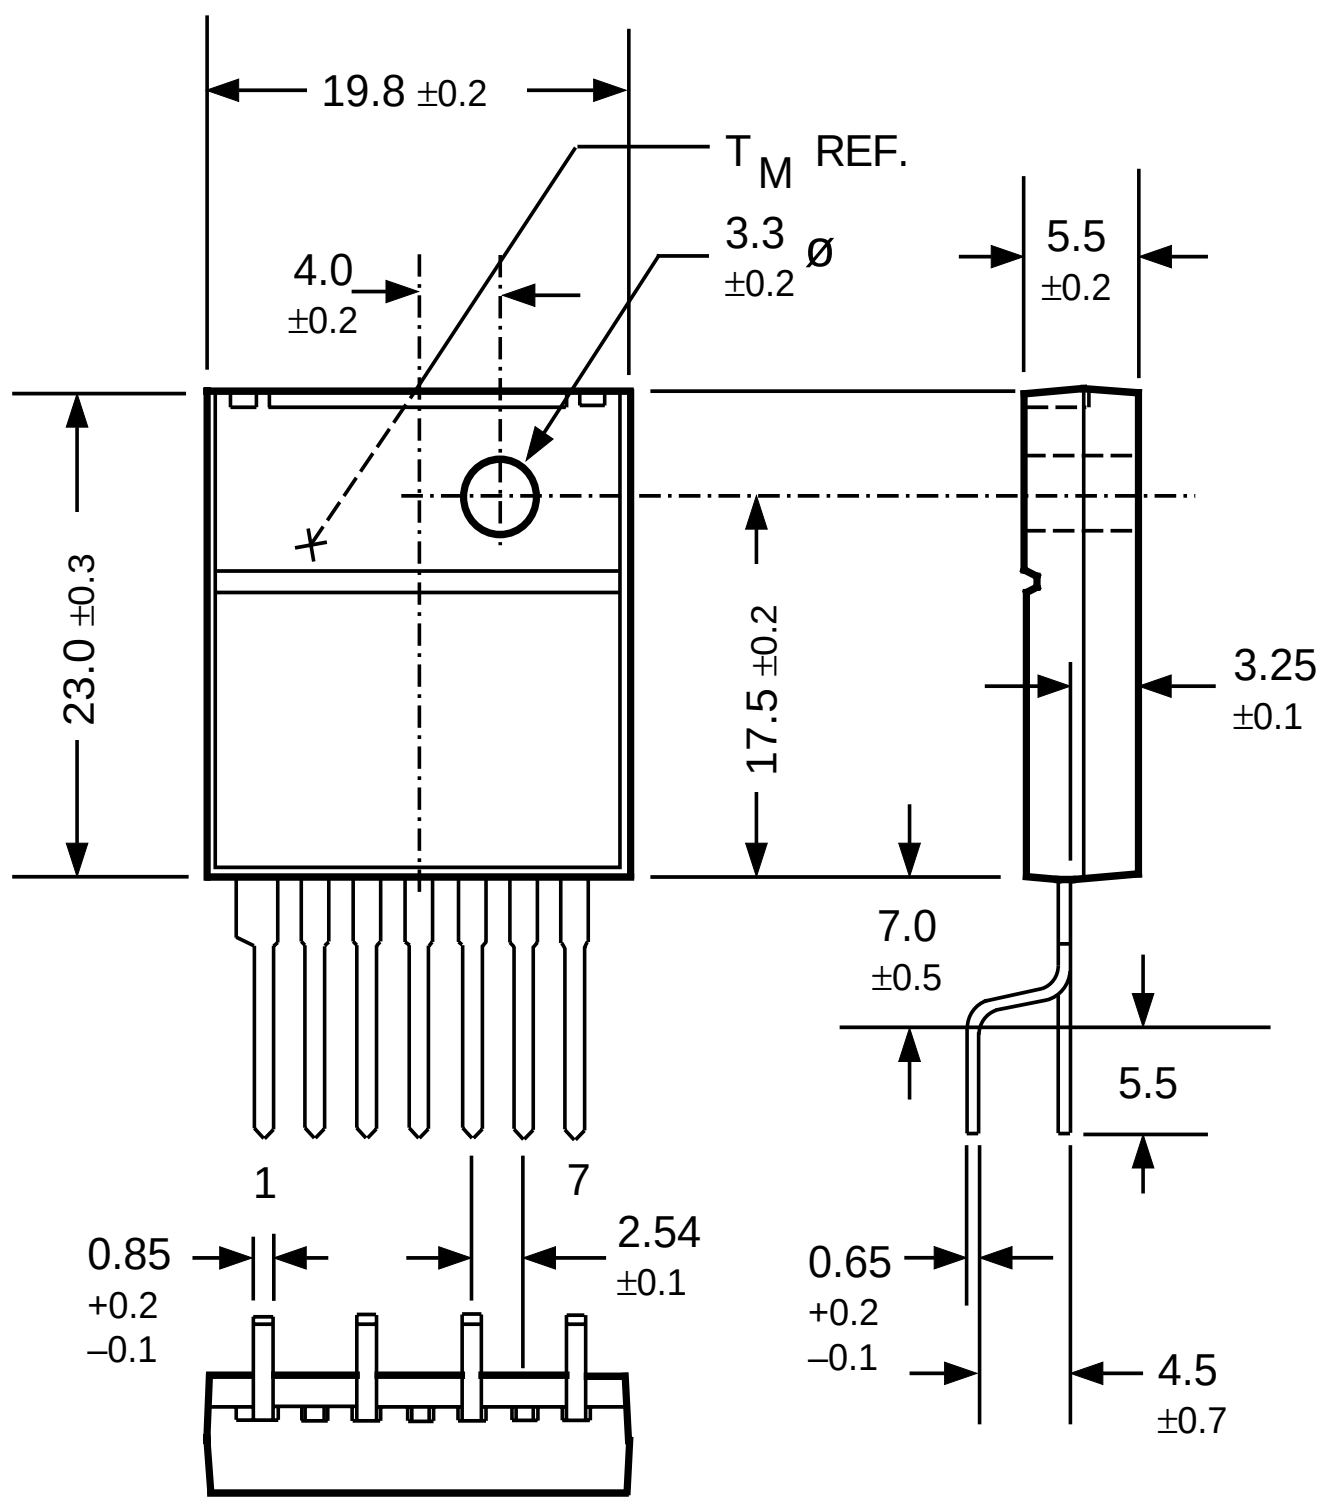

Dwg. MK-003-7 mm

NOTE: Exact body and lead configuration at vendor's option within limits shown.

Allegro® MicroSystems, Inc.
115 Northeast Cutoff, Box 15036
Worcester, Massachusetts 01615-0036 (508) 853-5000